

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

TI-27203

First Named Inventor or Application Identifier

Louis N. Hutter, et al.

Title

**MERGED BIPOLAR AND CMOS CIRCUIT AND
METHOD**

Express Mail Label No

EL255677865US

On Page 1 of the specification, before line 1, insert -This application claims priority under 35 USC § 119(e)(1) of provisional application number **60/079,444** filed **03/26/98**--**APPLICATION ELEMENTS**

See MPEP Chapter 600 concerning utility patent application contents

ADDRESS TO:Assistant Commissioner for Patents
Box Patent Application
Washington, DC 202311. ☒ Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original, and a duplicate for fee processing)6. ☐ Microfiche Computer Program (Appendix)2. ☒ Specification [Total Pages **14**]7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R&D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

a. ☐ Computer Readable Copyb. ☐ Paper Copy (identical to computer copy)c. ☐ Statement verifying identical of above copies3. ☒ Drawing(s) (35 USC d113) [Total Sheets **13**]4. Oath or Declaration [Total Pages **2**]a. ☒ Newly Executed (original or copy)b. ☐ Copy from a prior application (37 CFR §1.63(d))
(for continuation/divisional with Box 17 completed)**[Note Box 5 below]**

- i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s)
named in the prior application,
see 37 CFR §1.63(d)(2) and 1.133(b).

5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of
the oath or declaration is supplied under Box 4b, is considered as
being part of the disclosure of the accompanying application and is
hereby incorporated by reference therein**ACCOMPANYING APPLICATION PARTS**8. ☒ Assignment Papers (cover sheet & Documents(s))9. ☐ 37 CFR §3.73(b) Statement (when there is an assignee) ☒ Power of Attorney10. ☐ English Translation Document (if applicable)11. ☒ Information Disclosure Statement (IDS)/PTO-1449 **1** Copies of IDS Citations12. ☒ Preliminary Amendment13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application
Status still proper and desired
(PTO/SB/09-12)15. ☐ Certified Copy of Priority Document(s)
if foreign priority is claimed16. ☐ Other*A new statement is required to be entitled to pay small entity fees, except
where one has been filed in a prior application and is being relied upon17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information below and in a preliminary amendment:☐ Continuation☐ Divisional☐ Continuation-in-part (CIP)

of prior application No: /

Prior application information: Examiner

Group / Art Unit:

18. CORRESPONDENCE ADDRESS☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)



Correspondence address below

NAME

Jacqueline J. Garner, Texas Instruments Incorporated

ADDRESS

PO Box 655474, M/S 3999

CITY

Dallas

STATE

TX

ZIP CODE

75265

COUNTRY

USA

TELEPHONE

(972) 278-9694

FAX

(972) 917-4418


Name (Print/Type)

Jacqueline J. Garner

Registration No. (Attorney/Agent)

36,144

Signature



Date

3/25/99

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of:

Louis N. Hutter, et al.	Docket No.:	TI-27203
Serial No.: TBD	Examiner:	TBD
Filed: 03/25/99	Art Unit:	TBD
For:	MERGED BIPOLAR AND CMOS CIRCUIT AND METHOD	

PRELIMINARY AMENDMENT

Assistant Commissioner
For Patents
Washington, DC 20231

Mailing Label No. **EL255677865US**,


Date of Deposit: **March 25, 1999**

Dear Sir:

Please amend the specification by inserting before the first line, the sentence:

This application claims priority under 35 USC § 119 (e)(1) of provisional application number 60/079,444, filed 03/26/98.

Respectfully submitted,

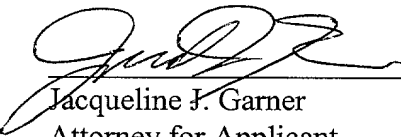
Jacqueline J. Garner
Attorney for Applicant
Reg. No. 36,144

Texas Instruments Incorporated
P.O. Box 655474, MS 3999
Dallas, Texas 75265
(972) 278-9694
(972) 917-4418 Fax

663260 08/29/2000

MERGED BIPOLAR AND CMOS CIRCUIT AND METHOD

FIELD OF THE INVENTION

This invention relates to semiconductor integrated circuits, and more specifically to integrated circuits that merge bipolar and CMOS technologies.

BACKGROUND OF THE INVENTION

Modern integrated circuits are typically based on either complementary-symmetry metal-oxide-semiconductor (CMOS) transistors or bipolar transistors. CMOS offers the advantages of a relatively inexpensive process, low power dissipation, and transistors that can be tightly packed and scaled. These features make CMOS a popular choice for very large scale digital integrated circuits such as those used in memory and microprocessor applications. Bipolar, on the other hand, is a preferred choice for analog applications because of its ability to provide high speed, high drive current, and good noise margin. Additionally, bipolar transistor junctions provide smaller threshold voltage variations and are therefore often used as voltage references.

So-called "BiCMOS" fabrication processes seek to offer the benefits of both transistor topologies on a single integrated circuit. BiCMOS processes in the past that have attempted to optimize both types of transistors have suffered from high complexity and hence a much higher cost than a standard high-performance CMOS process. Recent trends in the semiconductor industry toward low-voltage circuits with high signal-to-noise ratios have brought a renewed focus to BiCMOS circuits.

Performance has traditionally been commensurate with process complexity in BiCMOS circuits. Additional mask levels and dopant implant steps provided better isolation, latch-up protection, and superior bipolar performance. Figures 1a, 1b, and 1c are examples of three prior art BiCMOS configurations described in "BiCMOS Technology and Applications", A.R. Alvarez, ed., Kluwer Academic Publ., 1989, pp. 65-68. These figures illustrate the typical performance/complexity tradeoff. The structure shown in Figure 1a is a so-called "n-well" CMOS process that incorporates a

simple npn bipolar transistor. The channels of MOSFET transistors in a typical CMOS circuit are often formed in doped regions known in the art as "wells". In Figure 1a, the p-channel MOSFET is formed in an n-well, whereas the n-channel MOSFET is formed in the p- epitaxial layer. "Twin-well" CMOS incorporates a p-well for the n-channel device to allow further optimization of the n-channel transistor's performance characteristics. Additional wells also simplify device isolation.

In order to lessen the parasitic collector resistance and collector-base capacitance, more complex processes add a buried subcollector (n+) layer and substitute n-type epitaxial layers for the p- epi of Figure 1a. The buried layers help prevent latch-up, thereby allowing the use of a p- substrate rather than the p+ substrate in Figure 1a. The bipolar transistor of Figure 1b has superior performance characteristics over the structure of Figure 1a at the cost of the additional mask levels and implants for the buried layer and the deep n+ collector contact. The structure shown in Figure 1c is a high-performance twin-well BiCMOS circuit requiring even more complex processing.

A need exists in the industry for a process for building efficient high-gain bipolar transistors in a high-performance advanced CMOS process to produce increased analog circuit performance and flexibility at a cost comparable to that of the CMOS process alone.

SUMMARY OF THE INVENTION

In accordance with a preferred embodiment of the invention, there is disclosed a method for fabricating a BiCMOS integrated circuit. The method includes the steps of forming in a single implantation step a base region of a bipolar transistor and a p-well of an n-channel MOS transistor; and forming in a single implantation step a collector contact well of a bipolar transistor and an n-well of a p-channel MOS transistor.

In accordance with another preferred embodiment of the invention, there is disclosed a bipolar transistor. The transistor includes a collector region of a first doping profile within a semiconductor substrate of lighter doping and a base region

between the collector region and a surface of the semiconductor substrate. The base region adjoins the collector region and extends to the surface. An emitter region adjoins the base region and also extends to the surface. A collector contact well region adjoins the collector region and the base region, and extends to the substrate surface as well. The well region has a doping profile characterized by doping concentrations lighter than doping concentrations of the first doping profile.

An advantage of the inventive concepts is that a bipolar transistor can be fabricated using a twin-well CMOS process.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing features of the present invention may be more fully understood from the following detailed description, read in conjunction with the accompanying drawings, wherein:

Figures 1a, 1b, and 1c are cross-sectional diagrams of prior art BiCMOS structures;

Figures 2a to 2l are cross-sectional diagrams of a first embodiment BiCMOS structure at various steps in a first embodiment process;

Figure 3 is a plan view of the first embodiment structure of Figure 2l, exclusive of the metal layer 256;

Figures 4a and 4b are cross-sectional diagrams of a second embodiment BiCMOS structure at two steps in a second embodiment process;

Figure 5a is a spreading resistance plot of the emitter-base dopant profile of a bipolar transistor in the first embodiment BiCMOS structure;

Figure 5b is a spreading resistance plot of the emitter-base dopant profile of a bipolar transistor in the second embodiment BiCMOS structure;

Figures 6a and 6b are cross-sectional diagrams of a third embodiment BiCMOS structure at two steps in a third embodiment process;

Figures 7a and 7b are cross-sectional diagrams of a fourth embodiment BiCMOS structure at two steps in a fourth embodiment process; and

Figure 8 is a cross-sectional diagram of a fifth embodiment BiCMOS structure

at a step in a fifth embodiment process. The cross-sectional diagrams described above show the bipolar, n-channel MOS, and p-channel MOS transistors adjacent one another to facilitate the description of process flows. Note that in practice the bipolar and MOS transistors may be in close proximity as shown, or alternatively, may be distributed over a semiconductor die.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

A first preferred embodiment structure and process in accordance with the invention are described below with reference to Figures 2a to 2l.

(a) Begin with a p-type substrate 200 doped to a concentration sufficient to produce a resistivity in the range of approximately 6 to 8 ohm-cm. The substrate can be a p- surface region of a silicon wafer or a p- silicon epitaxial layer over a p+ surface region of a wafer, for example. In the latter case, the epitaxial layer thickness is preferably in the range of 10 to 20 μm .

(b) Grow an oxide layer (not shown) approximately 500 nm thick over the substrate and, using conventional photoresist processes, pattern the photoresist (not shown) for the formation of the buried layer 202. Implant antimony at a dose of $2.0\text{E}15$ at 60 keV, for example, followed by a 30 second drive at 1250°C . Strip the oxide. This may be followed by an optional blanket boron implant at a dose of $6.0\text{E}12$ at 50 keV, for example, to improve the isolation between other nearby buried layer regions (not shown). Note that an optional blanket p-doped buried layer (not shown) can also be implanted.

(c) Deposit p- epitaxial layer 204 using conventional processes. Layer 204 has a resistivity of approximately 6 to 8 ohm-cm and a thickness of approximately 3 μm , for example. Diffusion of the buried layer dopants into the p- epitaxial layer 204 results in the buried layer 202 being partially in the substrate 200 and partially in the epi layer 204. The doping profile of the buried layer 202 is characteristic of a heavy n-type impurity implant followed by a diffusion cycle and epi overgrowth. See Figure 2a.

(d) Thermally grow a pad silicon oxide 206 approximately 20 nm in thickness.

Using low pressure chemical vapor deposition (LPCVD), for example, deposit an approximately 140 nm silicon nitride layer (not shown) over the pad oxide. Deposit and pattern photoresist (not shown) over the nitride layer to form the doped regions 208 referred to hereinafter as the n-wells. After the patterning of the photoresist, remove the exposed portions of the nitride layer. Implant phosphorous at a dose of 1.0×10^{13} at 150 keV, then grow an approximately 400 nm thick n-well oxide 210. Remove the nitride layer (not shown) using hot phosphoric acid, for example. Implant boron at a dose of 6.0×10^{12} at 50 keV using n-well oxide 210 as a self-aligning mask to form the doped regions 212 referred to hereinafter as the p-wells. Perform a high temperature drive at about 1100 °C for approximately 500 minutes to diffuse the well dopants into the epi layer 204. The diffusion temperature and time produce a dopant profile in which the n-well 208 and the buried layer 202 adjoin together where the n-well is formed over the buried layer. The dopant profiles of the p-wells 212 are similar to one another because they are produced in the same implant and diffusion operations. The same is true of the n-wells 208. Note that the doping of the n-wells 208 is lighter than that of the buried layer 202. See Figure 2b.

(e) Strip the pad oxide 206 and n-well oxide 210. Grow a new pad oxide 214. Follow this with a new LPCVD nitride layer 216. Deposit photoresist (not shown) and pattern in preparation for forming the moat regions. Remove the portions of nitride layer 216 left exposed by the photoresist. See Figure 2c.

(f) Grow field oxide regions 218 to a thickness of approximately 620 nm using atmospheric or high-pressure standard local oxidation of silicon (LOCOS) techniques, for example. See Figure 2d.

(g) Remove the nitride layer 216 and pad oxide 214. Grow dummy gate oxide 220. Deposit photoresist 222 and pattern in preparation for a threshold adjustment implant for the n-channel MOS transistor and the base 211 of the NPN bipolar transistor. Perform threshold adjust, punch-through block, and channel stop implants using boron at the following approximate doses and energies: 1.5E12 at 20 keV, 4.0E12 at 70 keV, and 2.0E12 at 180 keV, respectively. These implants serve to set the channel and field threshold voltages for the n-channel MOS transistor. The

channel stop implant also augments the doping of the p-well 212, which acts as the base 211 of the npn bipolar transistor. See Figure 2e. Note that the n-channel threshold adjust, punch-through block, and channel stop implants are referred to collectively hereinafter as the "VTN" implants.

5 (h) Remove photoresist 222. Deposit photoresist 224 and pattern in preparation for the threshold adjustment, punch-through, and channel stop implants (hereinafter the "VTP" implants) for the p-channel MOS transistor. Perform threshold adjust, punch-through block, and channel stop implants using phosphorus at the following approximate doses and energies: 1.5E12 at 50 keV, 5.0E12 at 150
10 keV, and 2.5E12 at 380 keV, respectively. These implants serve to set the channel and field threshold voltages for the p-channel MOS transistor. See Figure 2f.

15 (i) Remove dummy gate oxide 220. Form gate oxide 226 by thermal oxidation, for example, to a thickness in the range of approximately 7 to 15 nm. Blanket deposit undoped polycrystalline silicon to a thickness of approximately 310 nm. Deposit photoresist (not shown) and pattern to expose the n-channel MOS gate region. Perform a phosphorus implant at a dose of approximately 3.0E15 at 50 keV. Anneal the structure at about 900 °C for approximately 30 minutes. Remove the existing photoresist and deposit another layer of photoresist (not shown) and pattern and etch to form n-doped poly gate 228 for the n-channel MOS transistor and the undoped poly
20 gate 230 for the p-channel MOS transistor. See Figure 2g. Poly resistors, capacitor electrodes, and other passive components are also formed in this poly etching step. Note that the undoped poly gate 230, which is covered by photoresist for the phosphorus implant above, can optionally be n-doped as is poly gate 228. An undoped p-channel MOS gate results in a surface-channel transistor, whereas an n+ poly gate
25 results in a buried-channel transistor.

(j) Deposit photoresist 231 and pattern to expose the n-channel MOS transistor and the emitter and collector contact well 213 regions of the npn bipolar transistor. Perform a low-doped drain (LDD) implant in the n-channel MOS transistor source/drain moat regions 232, the NPN collector contact moat 234, and
30 the npn emitter 236. The LDD implant is performed using phosphorus at a dose of

6.0E13 at 50 keV, for example. Form 200 nm sidewall spacers 237 of oxide or nitride on the polysilicon gates 228 and 230 using standard techniques. Perform an arsenic implant at a dose of approximately 3.0E15 at 120 keV followed by a phosphorus implant at a dose of 4.0E14 at 50 keV to finalize the source/drain regions 232, the npn collector contact 234, and the npn emitter 236. See Figure 2i.

(k) Remove the existing photoresist 231 and deposit and pattern photoresist 238 to expose the p-channel MOS transistor and the base region 211 of the npn bipolar transistor. Perform boron implant at a dose of 3.0E15 at 20 keV to form the source/drain moat regions 240 of the p-channel MOS transistor and the base contact 242 of the npn bipolar transistor. Anneal at about 875 °C for approximately 35 minutes. See Figure 2j. Note that the boron implant also dopes the previously undoped poly gate 230 of the p-channel MOS transistor.

(l) Deposit a layer of oxide 244 approximately 100 nm in thickness to serve as a silicidation mask. Deposit photoresist 246 and pattern to cover portions of the gate oxide layer 226 and silicidation mask oxide 244 stack at the edges of the emitter region 236 and over the field oxide regions 218 adjacent the emitter region. Remove the exposed gate oxide layer 226. See Figure 2k.

(m) Deposit titanium to a thickness of about 60 nm and heat at about 675 °C for approximately 30 minutes to form self-aligned silicide 250 over the p-channel MOS source/drain moat regions 240, the n-channel MOS source/drain moat regions 232, the collector contact 234, the base region 242, the emitter region 236, and the poly gates 228 and 230. The absence of silicide at the periphery of the emitter reduces the chance of degraded gain (h_{fe}) from recombination effects at the emitter edge that result from uneven silicide thickness or spiking at the bird's beak region. Note that an alternative method is to simply silicide the entire emitter region 236.

(n) Deposit an oxide layer 252 of approximately 1 um thickness and planarize using resist etch-back techniques, for example. Deposit photoresist (not shown) and pattern to form contact vias to the source/drain contacts of the MOS transistors and to the base, emitter, and collector contacts of the npn bipolar transistor. Etch the oxide layer 252 to expose the underlying contact regions. Remove the photoresist and

fill the vias with TiW 254 followed by AlCu 256, for example. Alternative metal schemes include tungsten plugs followed by TiN/AlCu or entirely tungsten metal. Deposit photoresist and pattern to form desired interconnections in the metal layer. Remove the photoresist. See Figure 2l. Apply subsequent interlevel dielectric and metal layers using conventional techniques.

Figure 3 is a top or plan view of the npn bipolar transistor layout described above. The structure is shown exclusive of the metal layers 254 and 256 and is included here to show the spatial relationship of the various mask levels used in the embodiment processes. The outer bounds of the buried layer are indicated by the dashed line 300 in Figure 3 and corresponds to element 202 in the series of cross-sections of Figures 2a to 2l. The n-well 208 in Figure 2 is shown as the annulus 302 in Figure 3. The outer bounds of the collector contact n-moat 234 is shown as element 304 in Figure 3. The outer bounds of the base contact p-moat 242 is shown as element 306 in Figure 3. The outer bounds of the emitter contact n-moat 236 is shown in Figure 3 as element 308. The silicidation mask oxide 244 of Figure 2 is shown as the annulus 310 in Figure 3. Finally, the outer bounds of the mask that may be used for threshold adjustment implants in the emitter region, described hereinbelow in additional embodiments, is shown as element 312 in Figure 3.

In a second preferred embodiment in accordance with the invention, shown in Figures 4a and 4b, the masking of the VTN implants described in step (g) above and in Figure 2e is modified. Specifically, the photoresist mask 422 is modified to cover the emitter region 400 in addition to the n-wells 408 covered in the first embodiment process described above. As shown in Figure 4b, the portion of the p-well 412 beneath the emitter contact 436 is devoid of dopants from the VTN implants, in contrast to the substantially uniform lateral base doping of the first embodiment. Consequently, the base doping is set solely by the p-well 412 doping level, resulting in a bipolar transistor with higher gain (h_{fe}) than in the first embodiment process. The second preferred embodiment process is achieved with only a modification of an implant mask. An integrated circuit die that includes both types of bipolar transistor is therefore easily fabricated. Such an integrated circuit could therefore include a high

H_{fe} bandgap reference device (formed with the no-VTN implant npn transistor) as well as a higher Early voltage transistor (formed with the VTN implant npn transistor) as may be used in the output stage of an amplifier, for example. Figure 5a is a spreading resistance plot of a transistor fabricated in accordance with the first preferred embodiment process, which includes the base VTN implants, and Figure 5b is a result of a transistor fabricated in accordance with the second preferred embodiment process, which omits the VTN implants. A comparison of the two plots makes clear the effect of the threshold adjustment, punch-through, and channel stop implants.

In a third preferred embodiment in accordance with the invention, the first and second preferred embodiment processes are modified as shown in Figures 6a and 6b. Specifically, the mask used for the VTP implants described in step (h) above and in Figure 2f is modified to expose the emitter region 600 in addition to the n-wells 608. This modification involves the mask for the VTP implants, and hence may be used in conjunction with the second preferred embodiment process in which the modification involves the masking for the VTN implants. Note that the third preferred embodiment could also be applied to the first preferred embodiment process. Figures 6a and 6b show the effects of the third preferred embodiment process on a structure that has been subjected to the second preferred embodiment process. In other words, the emitter region 600 is devoid of dopants from the VTN implants. Instead, the VTP implant results in an n-type region that extends deeper into the p-well 612 than the emitter 636 (shown in Figure 6b). As a result of these modifications, the bipolar transistor produced by the third preferred embodiment process has a higher gain than that produced by the second preferred embodiment process.

A fourth preferred embodiment in accordance with the invention is shown in Figures 7a and 7b. In this embodiment the bipolar transistor is formed in an n-well 700, rather than the p-well used in the first three embodiments described above. The base region 702 is formed with the VTN implants. The VTN implants counterdope the surface of n-well 700 to form the shallow (in the range of approximately 0.1 to 0.2 μ m) base region. The shallow base width makes possible an npn transistor capable of

higher operating speeds than the thicker-base embodiments described above where the base depth is set by the epi layer thickness. In addition, the use of a single set of implants for both the VTN implants and the base of the npn transistor saves a mask and the associated costs incurred in prior art approaches in which two different implant steps are used for the npn base and the threshold adjustment, channel-stop, and punch-through prevention implants of the n-channel MOS transistor.

In Figure 7b, the emitter region 704 and base contact 706 are formed in the base region 702 as in the embodiments described above. The collector contact 708 is formed in n-well 700, which acts as the collector for the transistor. This process relies on modified masks for the n-well and VTN implants, but otherwise adds no complexity to the embodiment processes described above. The fourth preferred embodiment structure can also be arranged to occupy less die space than the first preferred embodiment structure, for example. The annular n-well 302 (element 208 in Figures 2a to 2l) used for isolating the base region 211 from the remainder of epi layer 211 in Figure 2l can be avoided with the implanted base approach of the fourth preferred embodiment structure, thus saving die space.

A fifth preferred embodiment in accordance with the invention is shown in Figure 8. The structure of Figure 8 is similar to that of Figure 7b, except the buried layer 710 is omitted in Figure 8. The structure of Figure 8 provides an isolated vertical npn transistor that is manufacturable in standard CMOS processes, which typically lack the process steps involved in forming buried layers.

While this invention has been described with reference to illustrative embodiments, this description is not intended to be construed in a limiting sense. Various modifications and combinations of the illustrative embodiments, as well as other embodiments of the invention, will be apparent to persons skilled in the art upon reference to the description. It is therefore intended that the appended claims encompass any such modifications or embodiments.

WHAT IS CLAIMED IS:

1. A method for fabricating a BiCMOS integrated circuit, comprising the steps of:
forming in a single implantation step a base region of a bipolar transistor and
5 a p-well of an n-channel MOS transistor; and
forming in a single implantation step a collector contact well of a bipolar
transistor and an n-well of a p-channel MOS transistor.

2. A method for fabricating a BiCMOS integrated circuit, comprising the steps of:
10 forming an n-type collector region within a semiconductor substrate of lighter
doping;

forming a plurality of p-type wells, at least one of said plurality of p-type wells
forming a base region lying between said collector region and a surface of said
semiconductor substrate, said base region adjoining said collector region and
15 extending to said surface, and at least one of said plurality of p-type wells forming an
n-channel MOS well;

forming a plurality of n-type wells, at least one of said plurality of n-type wells
forming a collector contact well lying between said collector region and said surface of
said semiconductor substrate, said collector contact well adjoining said collector
20 region and extending to said surface, further said collector contact well lying between
said base region and said n-channel MOS well, and at least one of said plurality of n-
type wells forming a p-channel MOS well; and

forming an emitter region adjoining said base region, said emitter region
extending to said surface.

3. The method of Claim 2, further including the step of implanting p-dopants into
said p-type wells, excluding a portion of said base region adjacent said emitter region.

4. The method of Claim 2, further including the step of implanting n-type dopants
30 into said n-type wells and into a portion of said base region.

5. The method of Claim 4, further including the step of implanting n-type dopants into said n-type wells and into a portion of said base region.

5 6. A bipolar transistor, comprising:

a collector region of a first doping profile within a semiconductor substrate of lighter doping;

10 a base region between said collector region and a surface of said semiconductor substrate, said base region adjoining said collector region and extending to said surface;

an emitter region adjoining said base region, said emitter region extending to said surface; and

15 a well region adjoining said collector region and said base region and extending to said surface, said well region having a doping profile characterized by doping concentrations lighter than doping concentrations of said first doping profile.

7. The transistor of Claim 6, wherein said base region is characterized by a substantially uniform lateral doping profile.

20 8. The transistor of Claim 6, wherein said base region is characterized by a lighter doping concentration in a region adjacent said emitter region.

9. A BiCMOS integrated circuit, comprising:

(a) a bipolar transistor including a collector well contact region; and

25 (b) a MOS transistor having source and drain contacts formed in an n-well region, said collector well contact region and said n-well region having substantially the same dopant profile.

10. A BiCMOS integrated circuit, comprising:

30 (a) a bipolar transistor including:

a collector region within a semiconductor substrate, said collector region having a first dopant profile;

a base region between said collector region and a surface of said semiconductor substrate, said base region adjoining said collector region and extending to said surface, further said base region having a second doping profile;

an emitter region adjoining said base region, said emitter region extending to said surface; and

a collector contact well region adjoining said collector region and said base region and extending to said surface, said collector contact well region having a third doping profile, said third doping profile characterized by lighter doping concentrations than said first doping profile;

(b) an n-channel MOS transistor having source and drain contacts formed in a doped well region having said second doping profile; and

(c) a p-channel MOS transistor having source and drain contacts formed in a well region having said third doping profile.

11. The integrated circuit of Claim 10, wherein said base region comprises a region of lighter dopant concentration adjacent said emitter region.

ABSTRACT OF THE DISCLOSURE

A method for fabricating a BiCMOS integrated circuit. The method includes the steps of forming in a single implantation step a base region 211 of a bipolar transistor and a p-well 212 of an n-channel MOS transistor; and forming in a single implantation step a collector contact well 213 of a bipolar transistor and an n-well 208 of a p-channel MOS transistor.

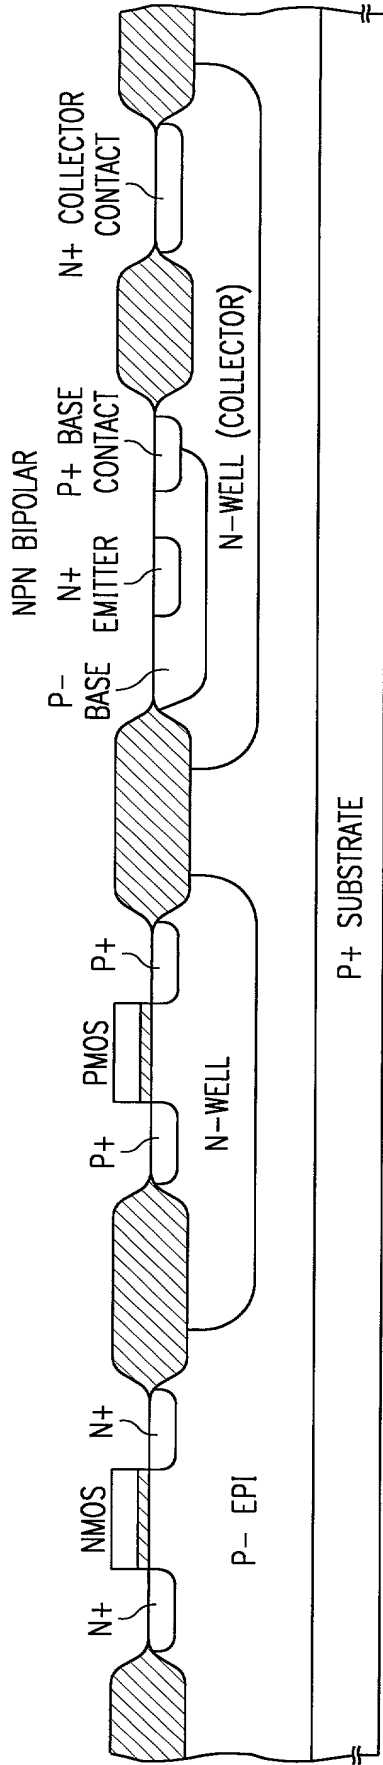


FIG. 1a
(PRIOR ART)

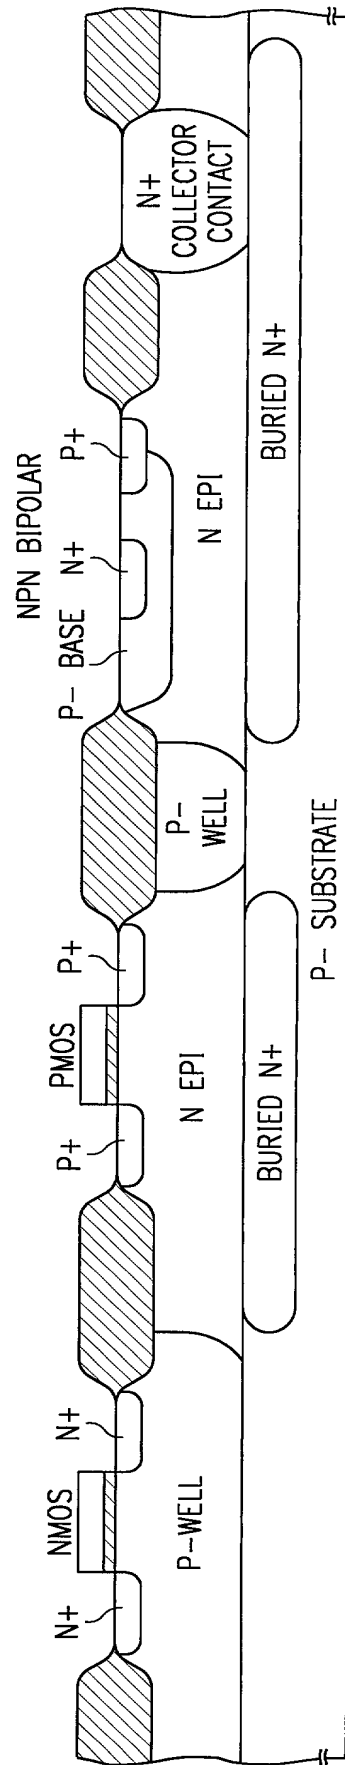


FIG. 1b
(PRIOR ART)

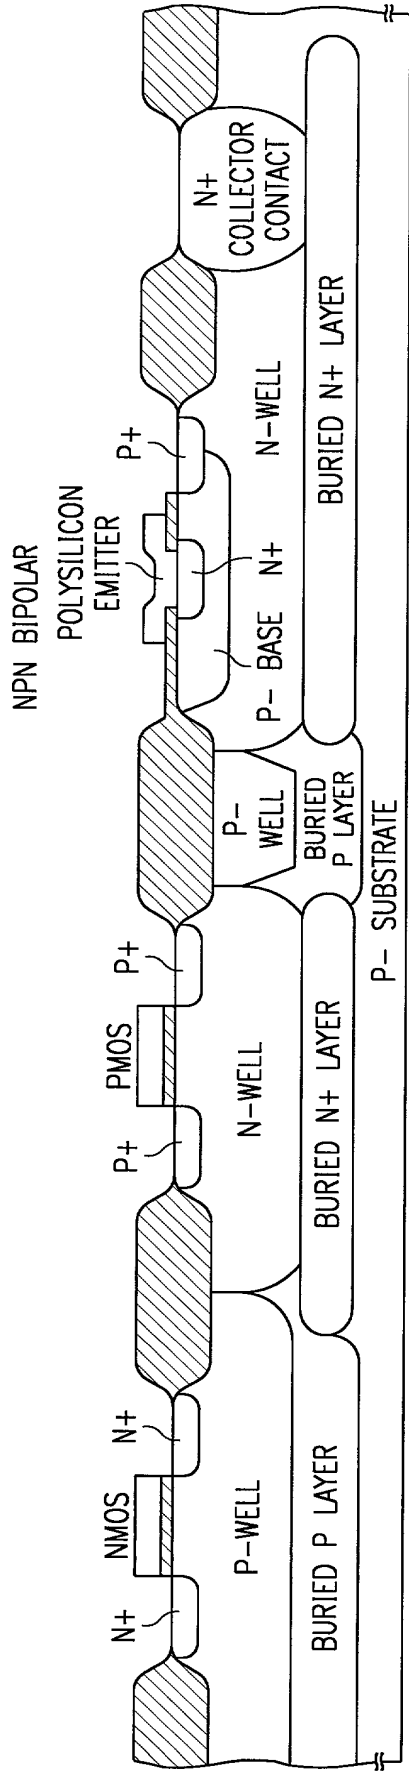


FIG. 1C
(PRIOR ART)

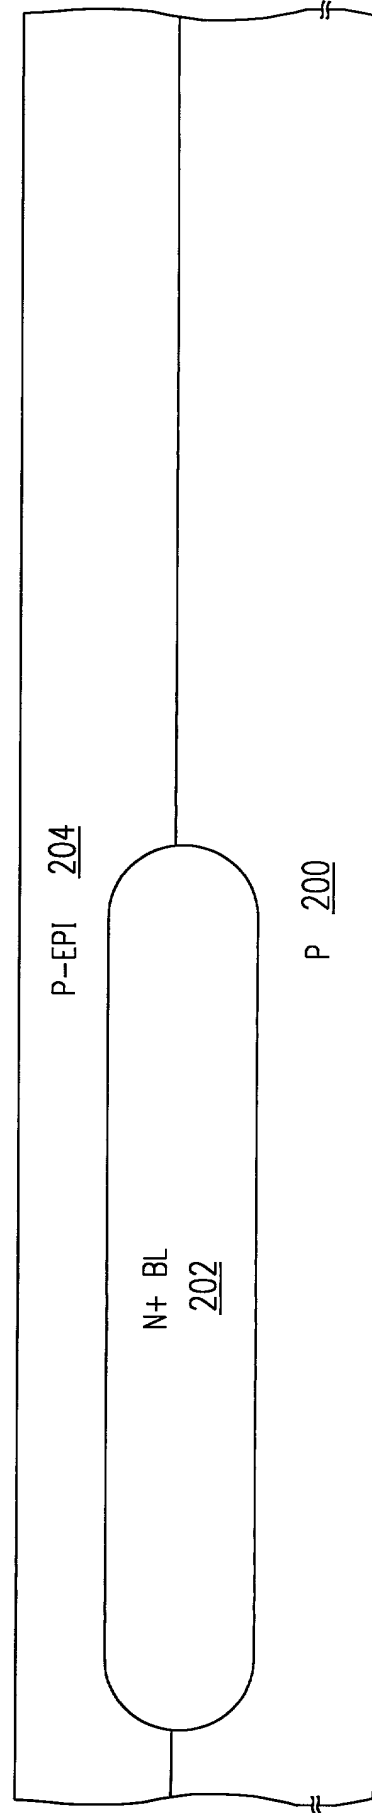


FIG. 2a

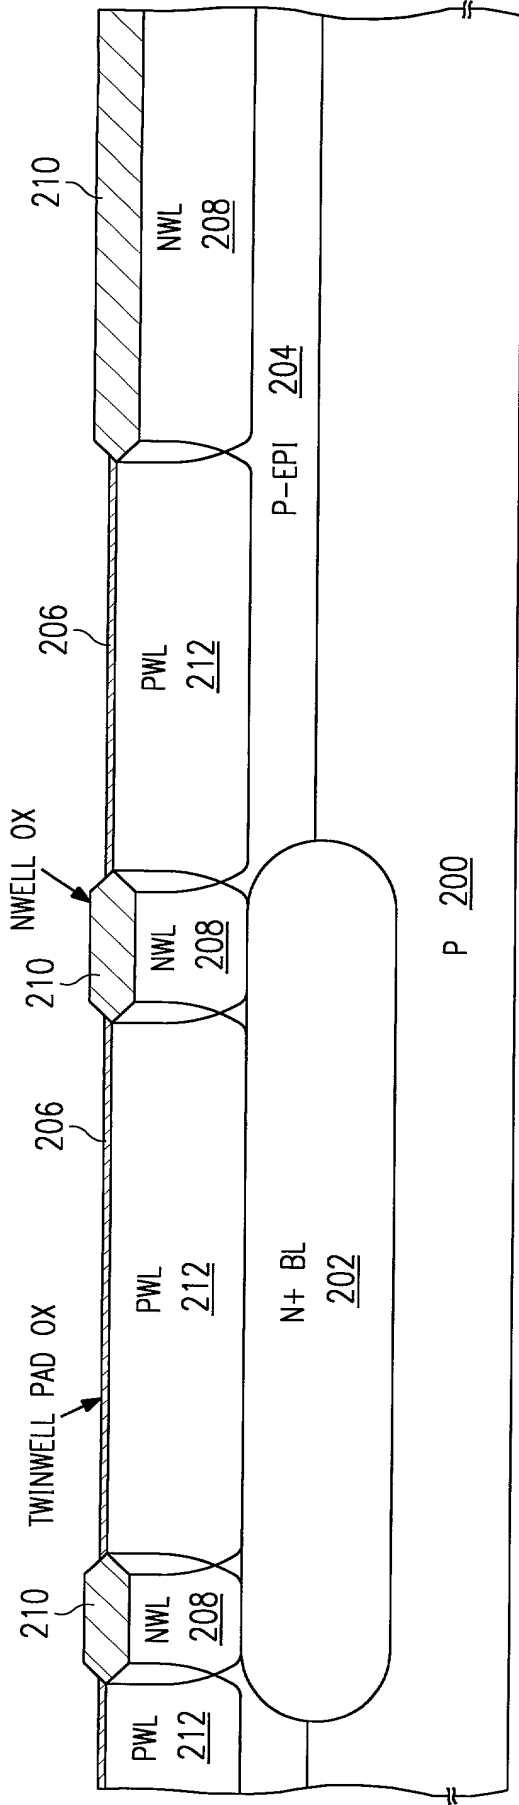


FIG. 2a

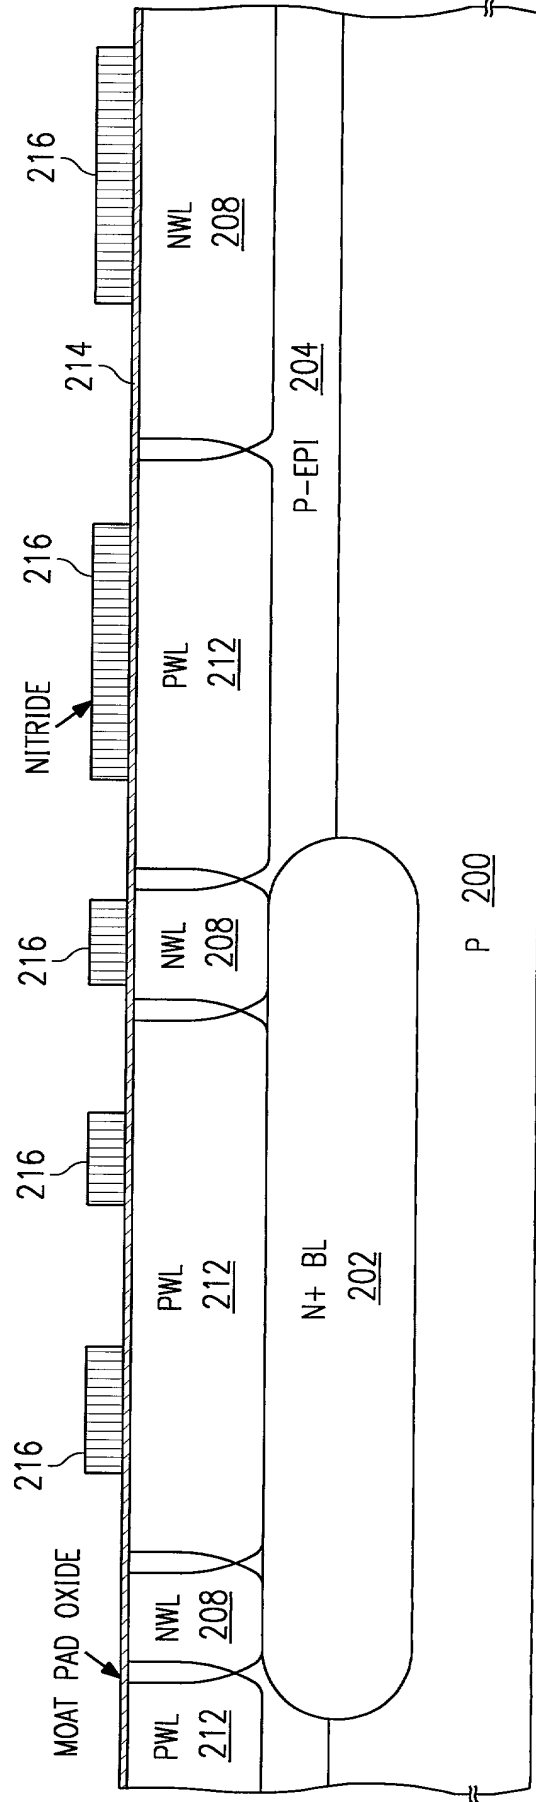


FIG. 2b

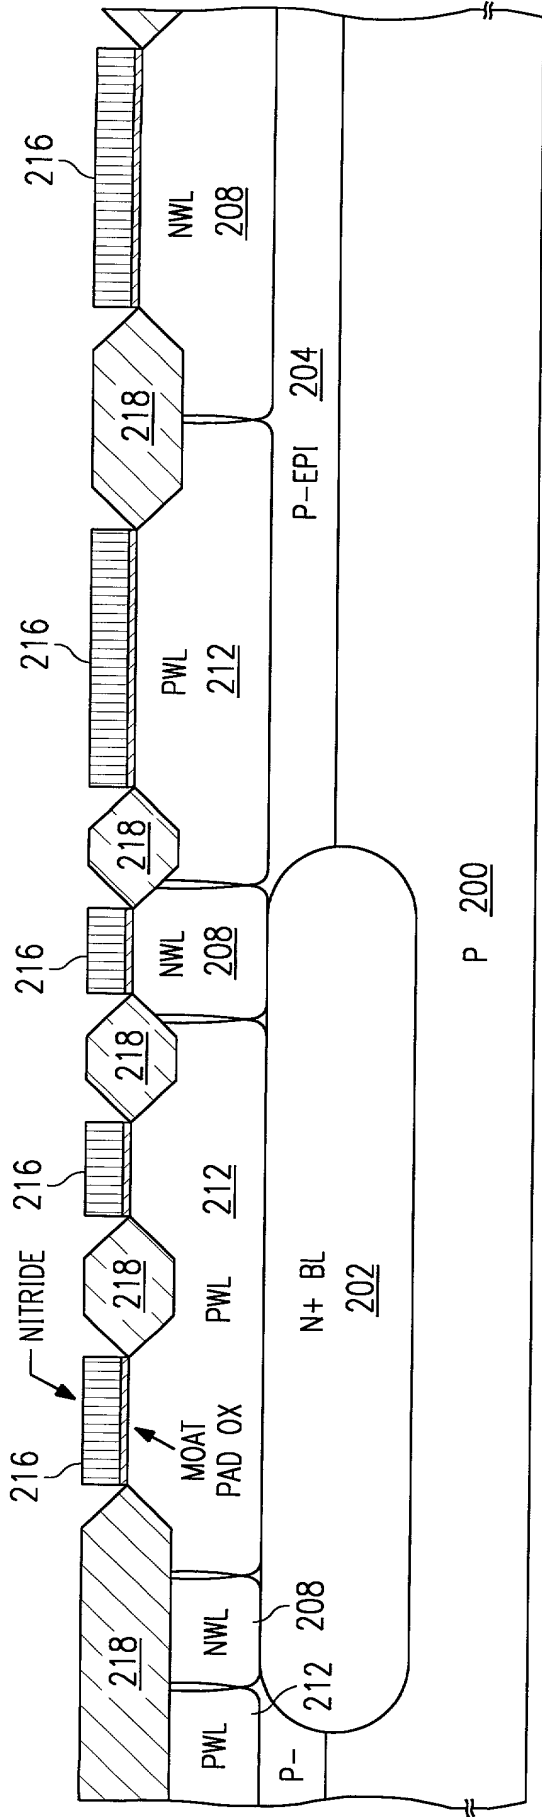


FIG. 2d

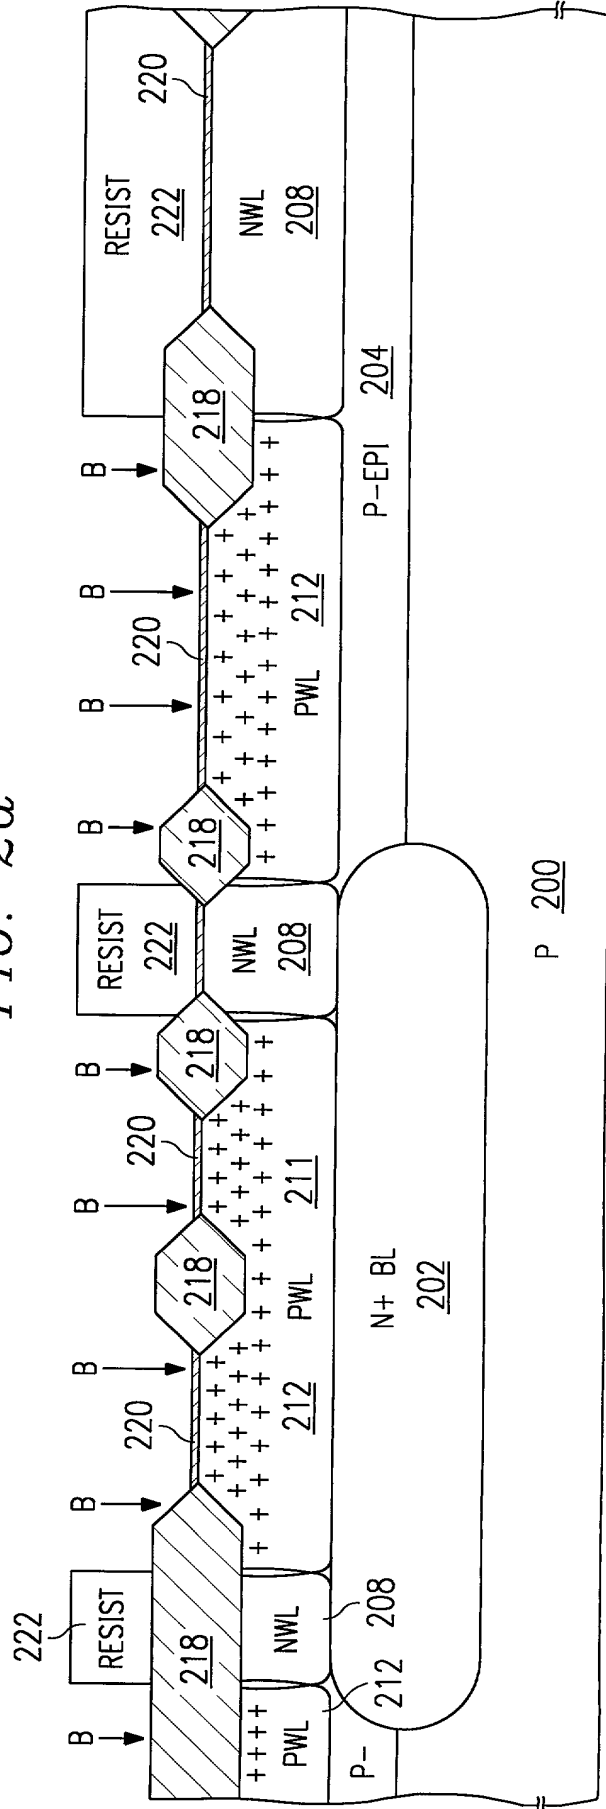
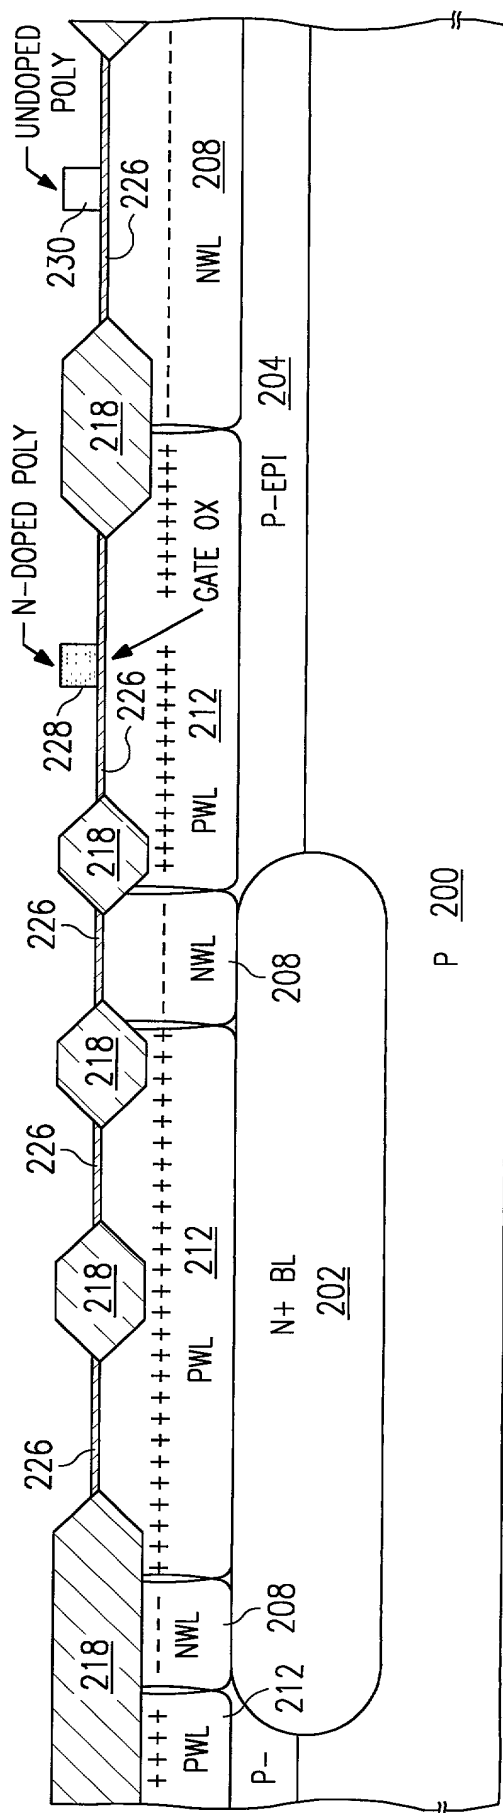
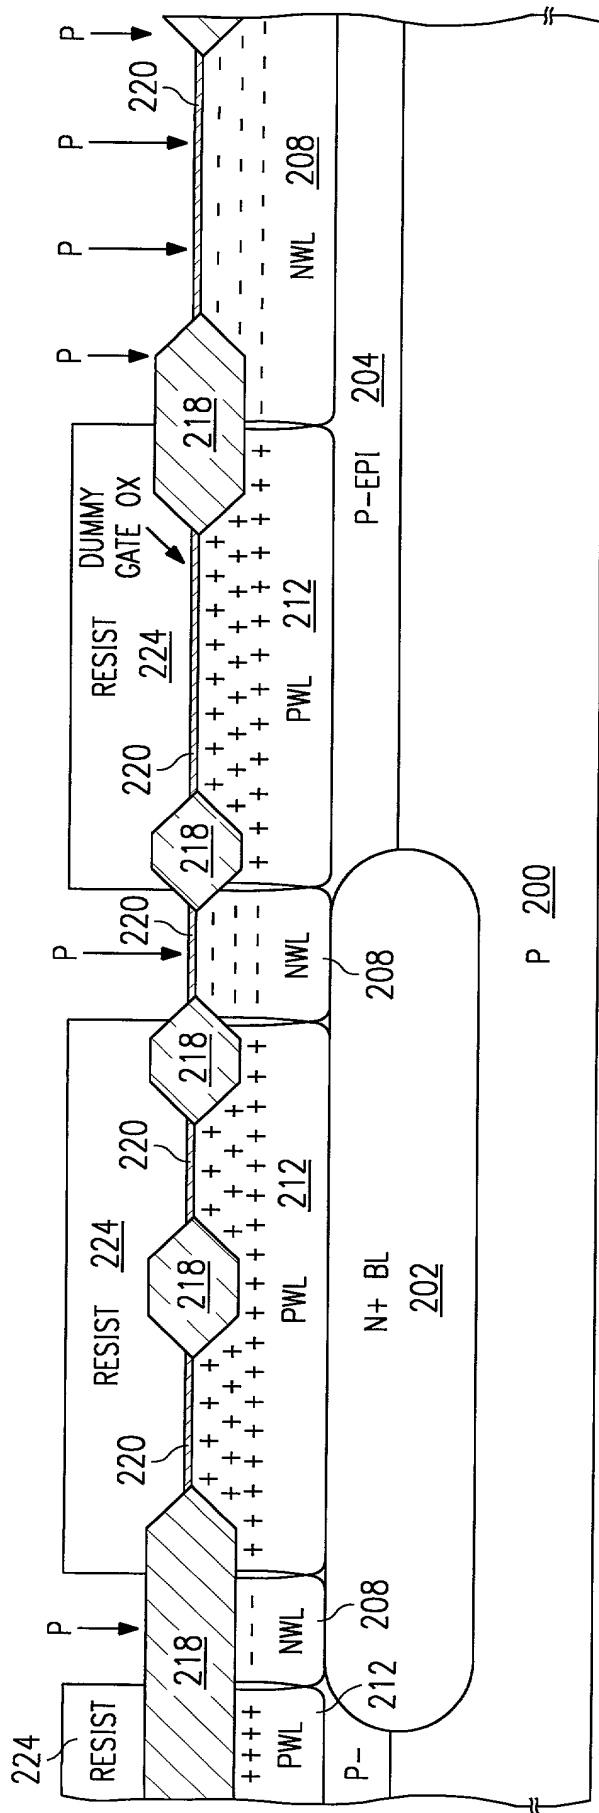




FIG. 2e








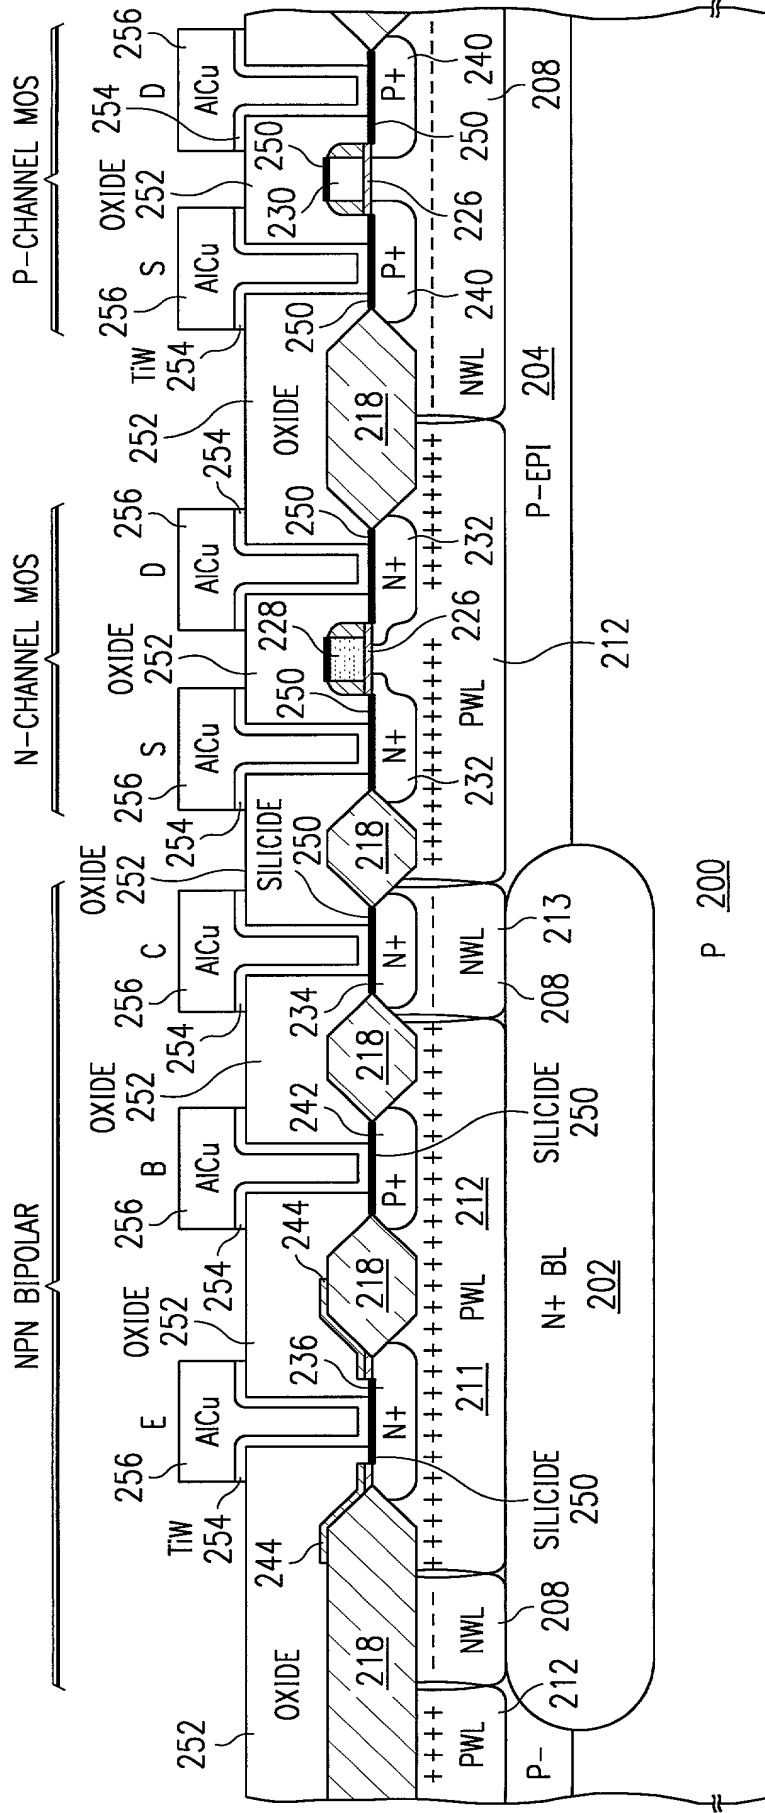



FIG. 21

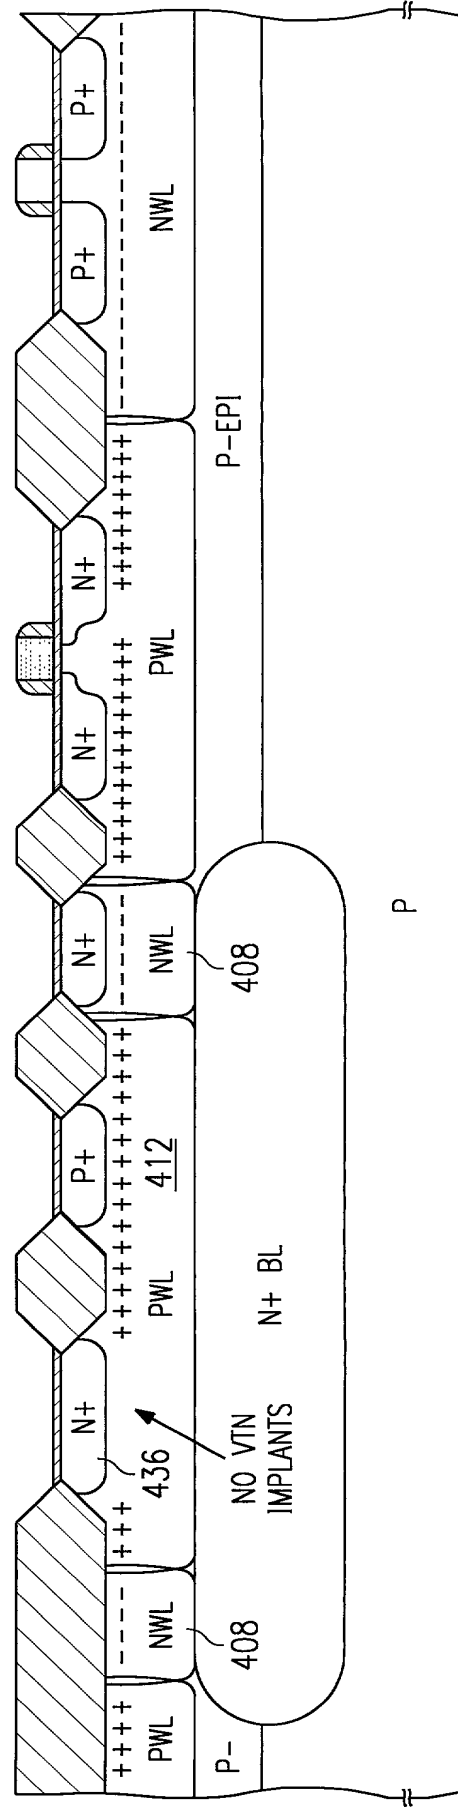

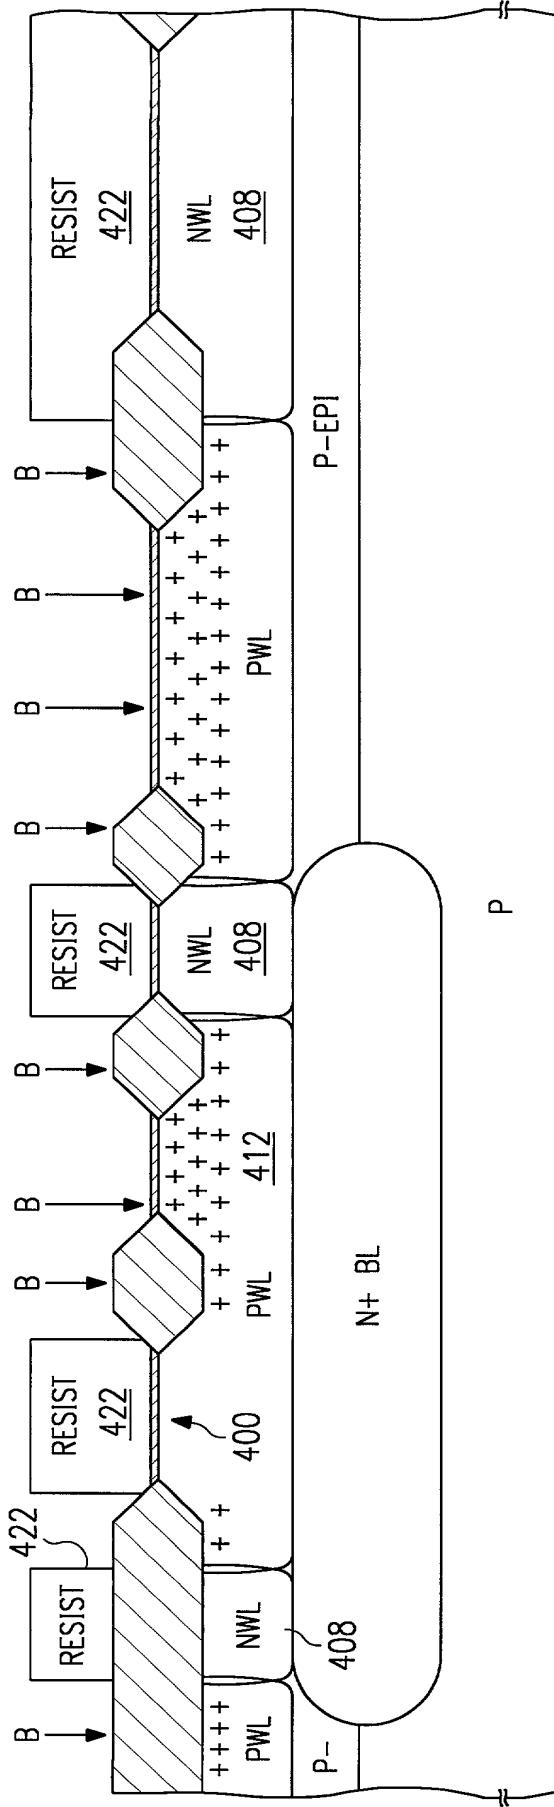


CARRIER
CONCENTRATION
(cm^{-3})

FIG. 5a

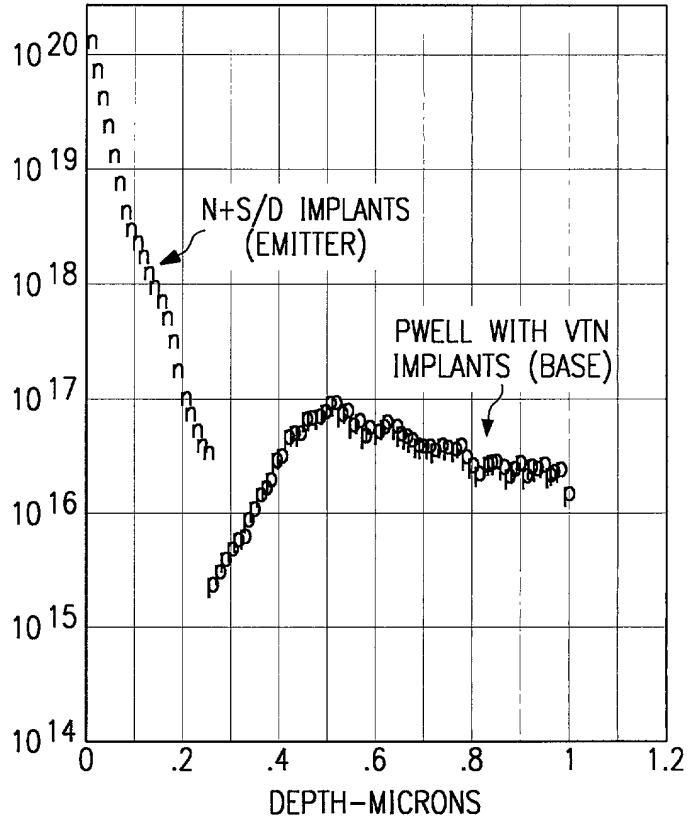

CARRIER
CONCENTRATION
(cm^{-3})

FIG. 5b

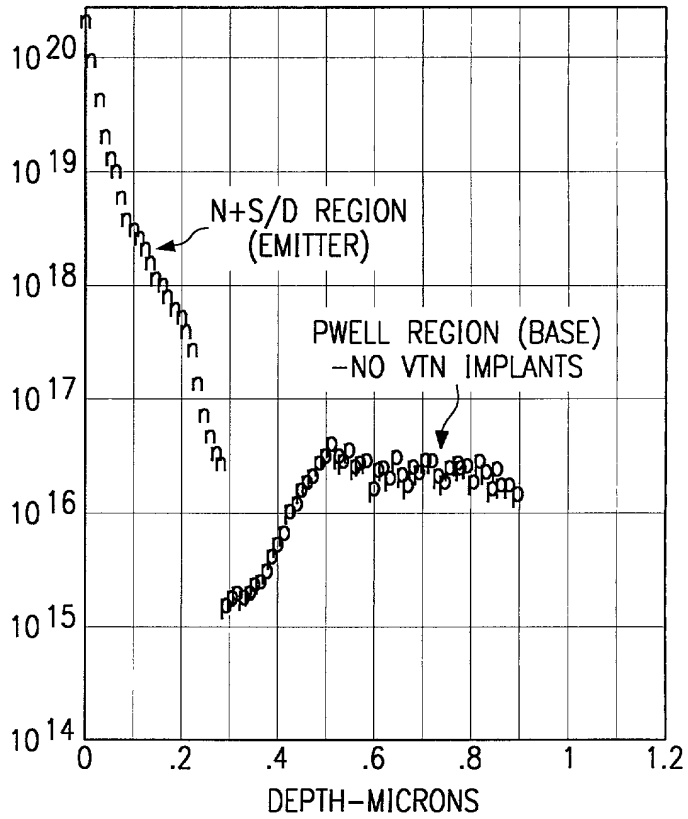

Parameter	Value	Unit
Initial concentration	1.0	g/L
Initial pH	7.0	
Temperature	25	°C
Time	0, 1, 2, 4, 8, 16, 32, 64, 128, 256, 512, 1024, 2048, 4096, 8192, 16384, 32768, 65536, 131072, 262144, 524288, 1048576, 2097152, 4194304, 8388608, 16777216, 33554432, 67108864, 134217728, 268435456, 536870912, 1073741824, 2147483648, 4294967296, 8589934592, 17179869184, 34359738368, 68719476736, 137438953472, 274877906944, 549755813888, 1099511627776, 2199023255552, 4398046511104, 8796093022208, 17592186044416, 35184372088832, 70368744177664, 140737488355328, 281474976710656, 562949953421312, 1125899906842624, 2251799813685248, 4503599627370496, 9007199254740992, 18014398509481984, 36028797018963968, 72057594037927936, 144115188075855872, 288230376151711744, 576460752303423488, 1152921504606846976, 2305843009213693952, 4611686018427387904, 9223372036854775808, 18446744073709551616, 36893488147419103232, 73786976294838206464, 147573952589676412928, 295147905179352825856, 590295810358705651712, 1180591620717411303424, 2361183241434822606848, 4722366482869645213696, 9444732965739290427392, 18889465931478580854784, 37778931862957161709568, 75557863725914323419136, 151115727451828646838272, 302231454903657293676544, 604462909807314587353088, 1208925819614629174706176, 2417851639229258349412352, 4835703278458516698824704, 9671406556917033397649408, 19342813113834066795298816, 38685626227668133590597632, 77371252455336267181195264, 154742504910672534362390528, 309485009821345068724781056, 618970019642690137449562112, 1237940039285380274899124224, 2475880078570760549798248448, 4951760157141521099596496896, 9903520314283042199192993792, 19807040628566084398385987584, 39614081257132168796771975168, 79228162514264337593543950336, 158456325028528675187087900672, 316912650057057350374175801344, 633825300114114700748351602688, 1267650600228229401496703205376, 2535301200456458802993406410752, 5070602400912917605986812821504, 10141204801825835211973625643008, 20282409603651670423947251286016, 40564819207303340847894502572032, 81129638414606681695789005144064, 162259276829213363391578010288128, 324518553658426726783156020576256, 649037107316853453566312041152512, 1298074214633706907132624082305024, 2596148429267413814265248164610048, 5192296858534827628530496329220096, 10384593717069655257060992658440192, 20769187434139310514121985316880384, 41538374868278621028243970633760768, 83076749736557242056487941267521536, 166153499473114484112975882535043072, 332306998946228968225951765070086144, 664613997892457936451903530140172288, 1329227995784915872903807060280344576, 2658455991569831745807614120560689152, 5316911983139663491615228241121378304, 10633823966279326983230456482242756608, 21267647932558653966460912964485513216, 42535295865117307932921825928971026432, 85070591730234615865843651857942052864, 170141183460469231731687303715884105728, 340282366920938463463374607431768211456, 680564733841876926926749214863536422912, 1361129467683753853853498429727072845824, 2722258935367507707706996859454145691648, 5444517870735015415413993718908291383296, 10889035741470030830827987437816582766592, 21778071482940061661655974875633165533184, 43556142965880123323311949751266331066368, 87112285931760246646623899502532662132736, 174224571863520493293247799005065324265472, 348449143727040986586495598010130648530944, 696898287454081973172991196020261297061888, 1393796574908163946345982392040522594123776, 2787593149816327892691964784081045188247552, 5575186299632655785383929568162090376495104, 11150372599265311570767859136324180752990208, 22300745198530623141535718272648361505980416, 44601490397061246283071436545296723011960832, 89202980794122492566142873090593446023921664, 178405961588244985132285746181186892047843328, 356811923176489970264571492362373784095686656, 713623846352979940529142984724747568191373312, 1427247692705959881058285969449495136382746624, 2854495385411919762116571938898990272765493248, 5708990770823839524233143877797980545530986496, 11417981541647679048466287755595961091061972992, 2283596308329	

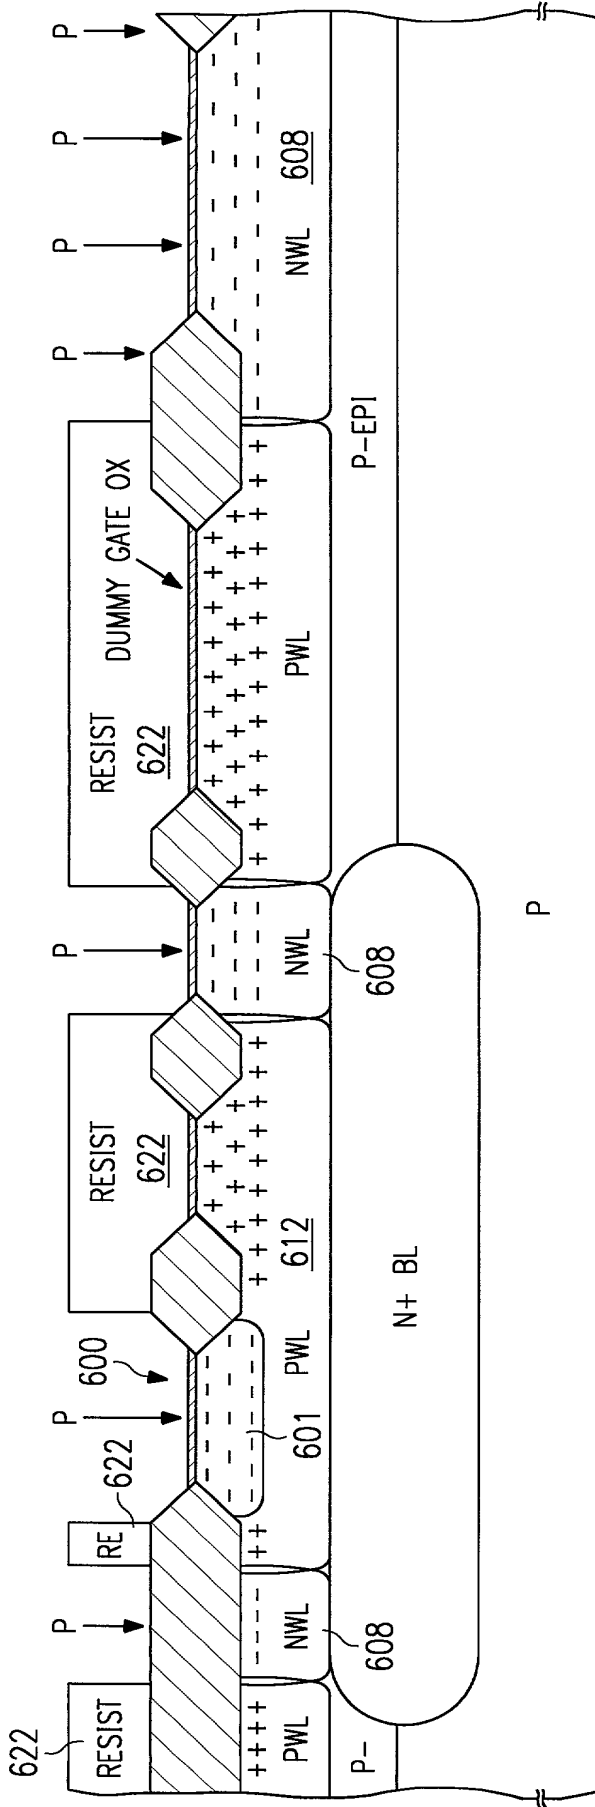


FIG. 6a

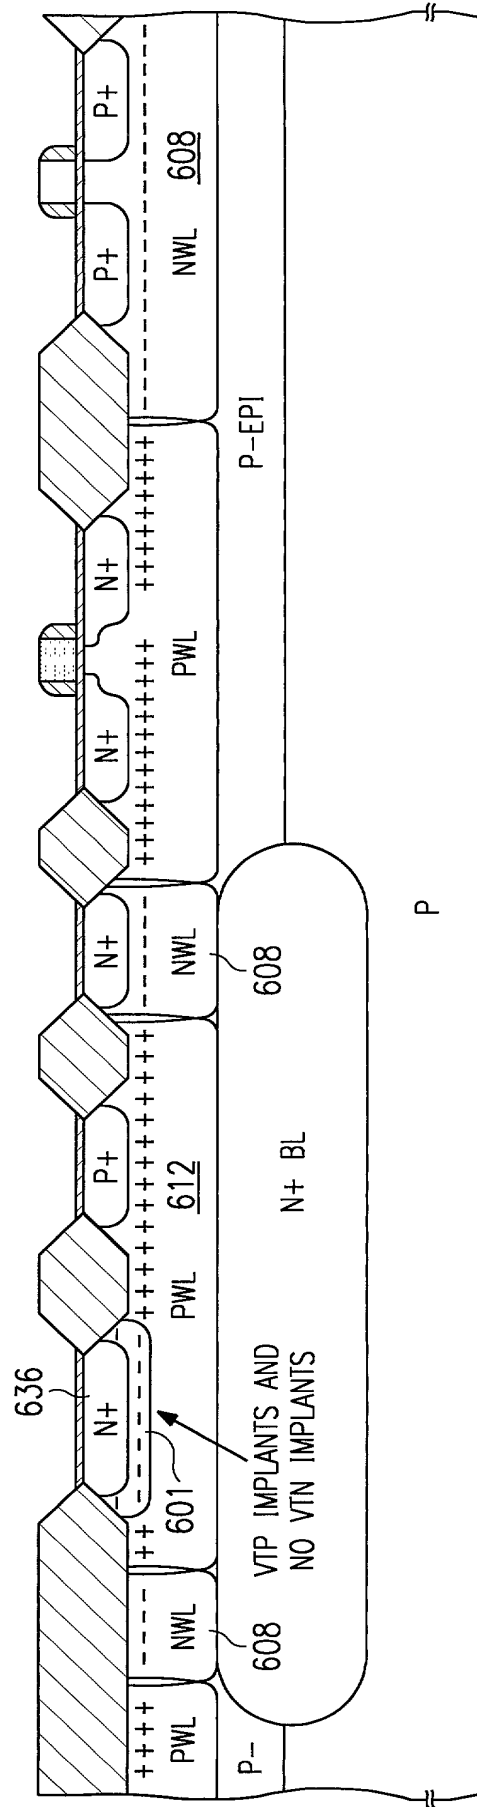


FIG. 6b

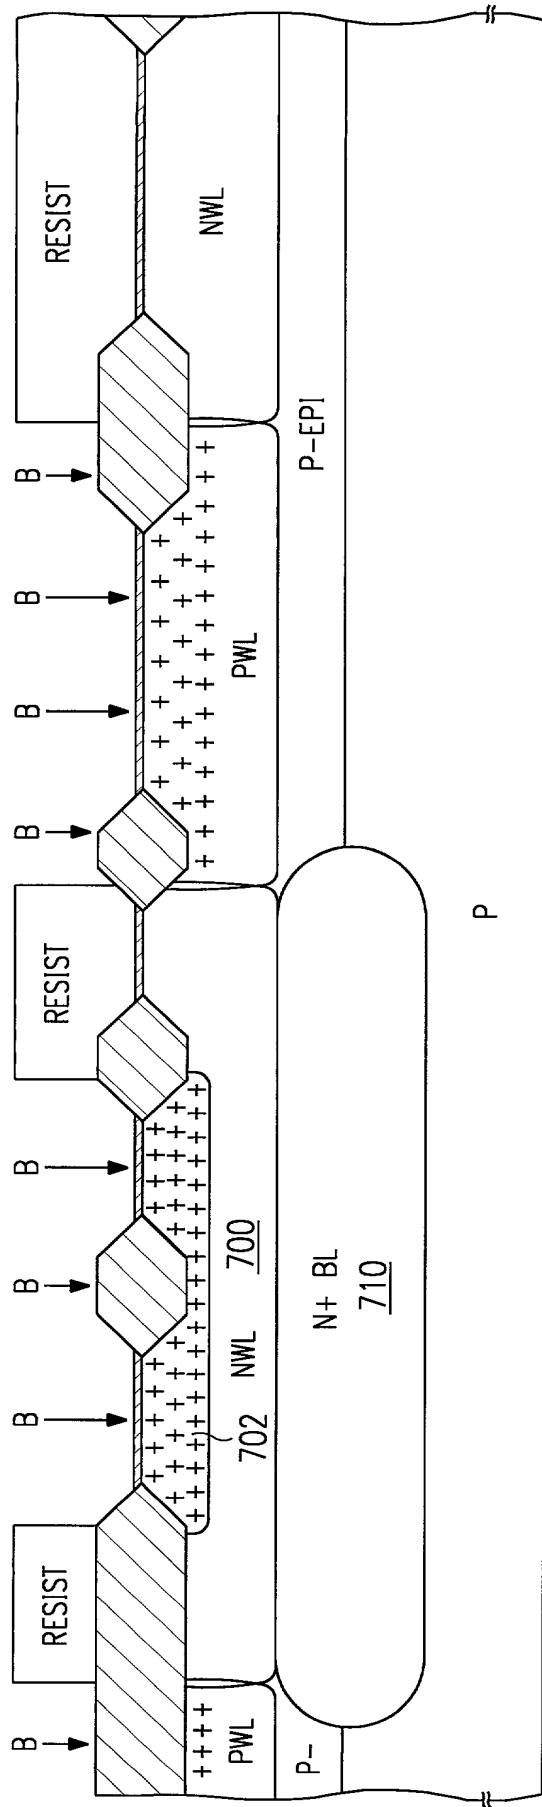


FIG. 7a

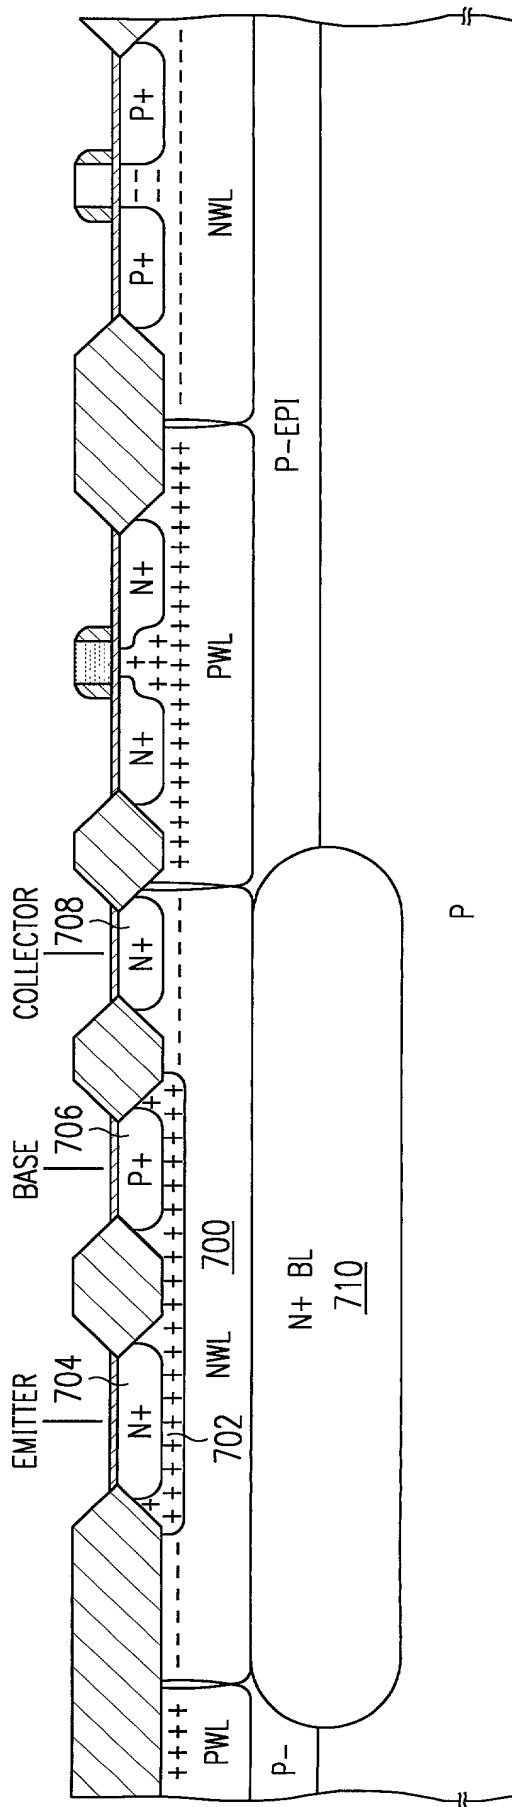

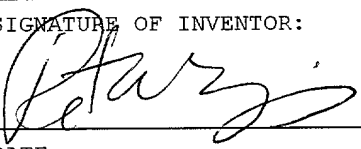



FIG. 7b

APPLICATION FOR UNITED STATES PATENT
DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor if only one name is listed below, or an original, first and joint inventor if plural inventors are named below, of the subject matter which is claimed and for which a patent is sought on the invention entitled as set forth below, and the title as set forth below which is described in the attached specification; that I have reviewed and understand the contents of the specification, including the claims, as amended by any amendment specifically referred to in the oath or declaration; and that I acknowledge my duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, section 1.56;

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.


TITLE OF INVENTION: MERGED BIPOLAR AND CMOS CIRCUIT AND METHOD		
POWER OF ATTORNEY: I HEREBY APPOINT THE FOLLOWING ATTORNEYS TO PROSECUTE THIS APPLICATION AND TRANSACT ALL BUSINESS IN THE PATENT AND TRADEMARK OFFICE CONNECTED THEREWITH		
Michael K. Skrehot, Reg. No. 36,682 Richard L. Donaldson, Reg. No. 25,673 Robby T. Holland, Reg. No. 33,304 William B. Kempler, Reg. No. 28,228 Jay M. Cantor, Reg. No. 19,906 Wade James Brady III, Reg. No. 32,080		
SEND CORRESPONDENCE TO:		DIRECT TELEPHONE CALLS TO:
Michael K. Skrehot Texas Instruments Incorporated P.O. Box 655474, MS 3999 Dallas, TX 75265		Michael K. Skrehot (972) 917-5456
NAME OF INVENTOR: (1) Louis N. Hutter	NAME OF INVENTOR: (2) Peter Ying	NAME OF INVENTOR: (3) Marco Corsi
RESIDENCE & POST OFFICE ADDRESS: 2303 Silver Holly Lane Richardson, Texas 75082	RESIDENCE & POST OFFICE ADDRESS: 1513 Brazos Trail Plano, TX 75075	RESIDENCE & POST OFFICE ADDRESS: 8804 Vernon Court Plano, Texas 75025
COUNTRY OF CITIZENSHIP: U.S.A.	COUNTRY OF CITIZENSHIP: U.S.A.	COUNTRY OF CITIZENSHIP: England
SIGNATURE OF INVENTOR: 	SIGNATURE OF INVENTOR: 	SIGNATURE OF INVENTOR: 
DATE: April 17, 1998	DATE: 5/5/98	DATE: 11th May 1998

669900-03292260

APPLICATION FOR UNITED STATES PATENT
DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor if only one name is listed below, or an original, first and joint inventor if plural inventors are named below, of the subject matter which is claimed and for which a patent is sought on the invention entitled as set forth below, and the title as set forth below which is described in the attached specification; that I have reviewed and understand the contents of the specification, including the claims, as amended by any amendment specifically referred to in the oath or declaration; and that I acknowledge my duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, section 1.56;

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

TITLE OF INVENTION: MERGED BIPOLAR AND CMOS CIRCUIT AND METHOD		
POWER OF ATTORNEY: I HEREBY APPOINT THE FOLLOWING ATTORNEYS TO PROSECUTE THIS APPLICATION AND TRANSACT ALL BUSINESS IN THE PATENT AND TRADEMARK OFFICE CONNECTED THEREWITH Michael K. Skrehot, Reg. No. 36,682 Richard L. Donaldson, Reg. No. 25,673 Robby T. Holland, Reg. No. 33,304 William B. Kempler, Reg. No. 28,228 Jay M. Cantor, Reg. No. 19,906 Wade James Brady III, Reg. No. 32,080		
SEND CORRESPONDENCE TO: Michael K. Skrehot Texas Instruments Incorporated P.O. Box 655474, MS 3999 Dallas, TX 75265		DIRECT TELEPHONE CALLS TO: Michael K. Skrehot (972) 917-5456
NAME OF INVENTOR: (4) Imran Khan	NAME OF INVENTOR:	NAME OF INVENTOR:
RESIDENCE & POST OFFICE ADDRESS: 3609 Charleston Drive Richardson, TX 75082	RESIDENCE & POST OFFICE ADDRESS:	RESIDENCE & POST OFFICE ADDRESS:
COUNTRY OF CITIZENSHIP: Pakistani	COUNTRY OF CITIZENSHIP:	COUNTRY OF CITIZENSHIP:
SIGNATURE OF INVENTOR: 	SIGNATURE OF INVENTOR:	SIGNATURE OF INVENTOR:
DATE: 5/6/98	DATE:	DATE:

669220 03/29/2000